


w127 Winkel

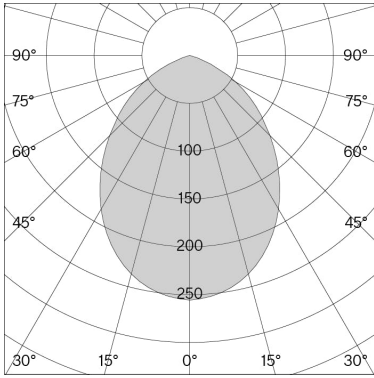

Technical information

Physical

Material	Lamp body, shade & glare shade: solid biopolyamide Base/clamp: solid biopolyamide & steel Heat sink & Wall/Rail bracket: aluminium Pin: stainless steel
-----------------	---

Optics	Diffuser & reflector: polycarbonate
---------------	-------------------------------------

IP rating	20
------------------	----

Protection class	II
-------------------------	----

LED

Light source	COB LED (included)
---------------------	--------------------

Life time expectancy	L80 / 50,000 h
-----------------------------	----------------

CRI Colour Rendering Index	97
-----------------------------------	----

Standard deviation of colour matching	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	b2
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	3000 K / 497 lm
Voltage / System power	100–240 V / 8.2 W
Efficacy	60 lm / W
Light control	Integrated dimmer switch
Net weight	2.4 kg
Packaging dimensions	L54 × W38 × H10 cm (0.02 m³)
Gross weight	5.2kg


Colour

White (similar to RAL 9010)		127B202 / 7330492006277
Black (similar to RAL 9011)		127B205 / 7330492006291
Grey (similar to NCS S 400-N)		127B204 / 7330492006284

Accessories




Adapter suitable for Vitra AdHoc	
Adapter suitable for Vitra CDS & Joyn	
Adapter suitable for Vitra Tyde	

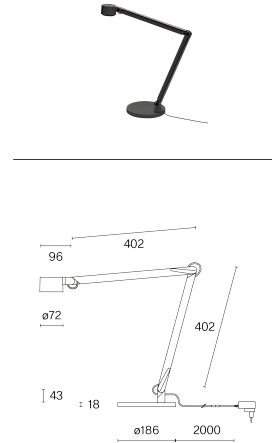w127 Winkel b2




Version	b2
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	3000 K / 497 lm
Voltage / System power	100–240 V / 8.2 W
Efficacy	60 lm / W
Light control	Integrated dimmer switch
Net weight	2.4 kg
Packaging dimensions	L54 × W38 × H10 cm (0.02 m³)
Gross weight	5.2kg

Art. No. / EAN code


White (similar to RAL 9010)		127B202 / 7330492006277
Black (similar to RAL 9011)		127B205 / 7330492006291
Grey (similar to NCS S 400-N)		127B204 / 7330492006284

Art. No. / EAN code

w127 Winkel c2

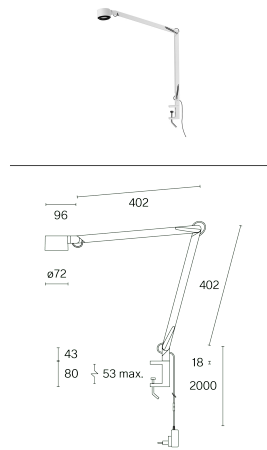

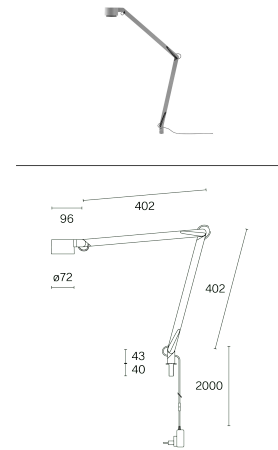


w127 Winkel p2



Article-specific information

Version	c2	p2
Mounting	Clamp	Pin - integrated (hole \varnothing 12 mm)
LED Colour temperature (CCT) / Luminous flux	3000 K / 497 lm	3000 K / 497 lm
Voltage / System power	100–240 V / 8.2 W	100–240 V / 8.2 W
Efficacy	60 lm / W	60 lm / W
Light control	Integrated dimmer switch	Integrated dimmer switch
Net weight	0.8 kg	0.6 kg
Packaging dimensions	L54 × W38 × H10 cm (0.02 m ³)	L54 × W38 × H10 cm (0.02 m ³)
Gross weight	2.4 kg	2.2 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
White (similar to RAL 9010) 	127C202 / 7330492006314	127P202 / 7330492006352
Black (similar to RAL 9011) 	127C205 / 7330492006338	127P205 / 7330492006376
Grey (similar to NCS S 400-N) 	127C204 / 7330492006321	127P204 / 7330492006369

Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra AdHoc		127-PVI01 / 7330492002439
Adapter suitable for Vitra CDS & Joyn		127-PVI02 / 7330492002446
Adapter suitable for Vitra Tyde		127-PVI03 / 7330492002453