


## w127 Winkel

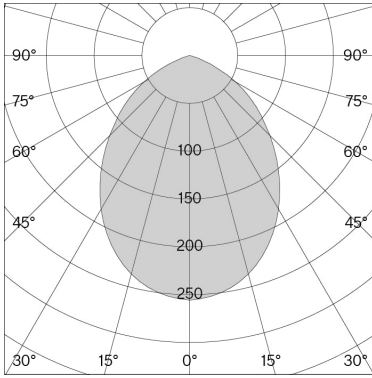

## Technical information

### Physical

<b>Material</b>	Lamp body, shade & glare shade: solid biopolyamide Base/clamp: solid biopolyamide & steel Heat sink & Wall/Rail bracket: aluminium Pin: stainless steel
-----------------	---

<b>Optics</b>	Diffuser & reflector: polycarbonate
---------------	-------------------------------------

<b>IP rating</b>	20
------------------	----

<b>Protection class</b>	III
-------------------------	-----

### LED

<b>Light source</b>	COB LED (included)
---------------------	--------------------

<b>Life time expectancy</b>	L80 / 50,000 h
-----------------------------	----------------

<b>CRI Colour Rendering Index</b>	97
-----------------------------------	----

<b>Standard deviation of colour matching</b>	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

## Article-specific information

### Version

### Mounting

### LED Colour temperature (CCT) / Luminous flux

### Voltage / System power

### Efficacy

### Light control

### Net weight

### Packaging dimensions

### Gross weight

### Colour

White (similar to RAL 9010)

Black (similar to RAL 9011)

Grey (similar to NCS S 400-N)


### Accessories

Adapter suitable for Vitra AdHoc

Adapter suitable for Vitra CDS & Joyn

Adapter suitable for Vitra Tyde

## w127 Winkel b2



### b2

### Base

3000 K / 497 lm

100–240 V / 8.2 W

60 lm / W

Integrated dimmer switch

2.4 kg

L54 × W38 × H10 cm (0.02 m³)

5.2kg

### Art. No. / EAN code


**127B202** / 7330492006277

**127B205** / 7330492006291


**127B204** / 7330492006284

### Art. No. / EAN code

## w127 Winkel c2

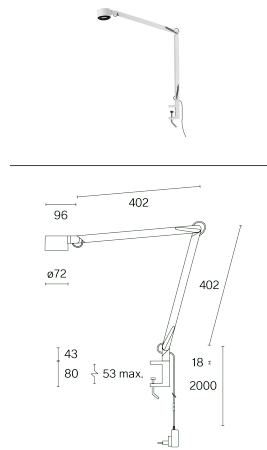

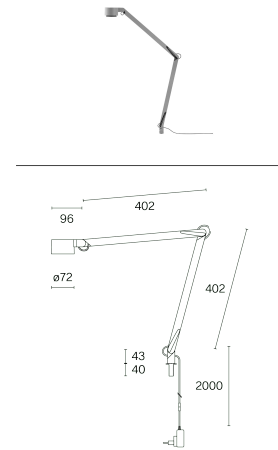


## w127 Winkel p2



## Article-specific information

Version	c2	p2
Mounting	Clamp	Pin - integrated (hole ø12 mm)
LED Colour temperature (CCT) / Luminous flux	3000 K / 497 lm	3000 K / 497 lm
Voltage / System power	100–240 V / 8.2 W	100–240 V / 8.2 W
Efficacy	60 lm / W	60 lm / W
Light control	Integrated dimmer switch	Integrated dimmer switch
Net weight	0.8 kg	0.6 kg
Packaging dimensions	L54 × W38 × H10 cm (0.02 m <sup>3</sup> )	L54 × W38 × H10 cm (0.02 m <sup>3</sup> )
Gross weight	2.4 kg	2.2 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
White (similar to RAL 9010) 	<b>127C202</b> / 7330492006314	<b>127P202</b> / 7330492006352
Black (similar to RAL 9011) 	<b>127C205</b> / 7330492006338	<b>127P205</b> / 7330492006376
Grey (similar to NCS S 400-N) 	<b>127C204</b> / 7330492006321	<b>127P204</b> / 7330492006369

Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra AdHoc		<b>127-PVI01</b> / 7330492002439
Adapter suitable for Vitra CDS & Joyn		<b>127-PVI02</b> / 7330492002446
Adapter suitable for Vitra Tyde		<b>127-PVI03</b> / 7330492002453