


w132 Nendo s traffic white

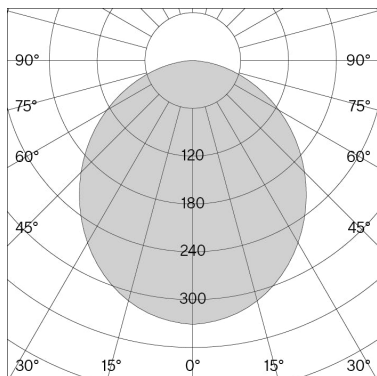

Technical information


Physical	
Material	Shade: aluminium Base & pole: steel LED engine: aluminium & PMMA Canopy: polycarbonate
Optics	Opal diffuser
IP rating	20
Protection class	I
LED	
Light source	Integrated LED
Lifetime expectancy	L80 / 50.000 h
CRI Colour rendering index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	s
Mounting	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 850 lm
Voltage / System power	100–240 V / 15 W
Efficacy	57 lm / W
Light control	Phase-cut dim
Net weight	1.9 kg
Packaging dimensions	L68.6 × W37.7 × H32.5 cm (0.09 m ³)
Gross weight	5.6 kg
Colour	
Traffic white (RAL 9016)	<input type="radio"/>
Jet black (RAL 9005)	<input checked="" type="radio"/>
Accessories	
1-phase track adapter with steel wire suspension white	<input type="radio"/>
1-phase track adapter with steel wire suspension black	<input checked="" type="radio"/>
3-phase track adapter with steel wire suspension white	<input type="radio"/>
3-phase track adapter with steel wire suspension black	<input checked="" type="radio"/>


w132 Nendo s




Art. No. / EAN code	132S102 / 7330492006604
Art. No. / EAN code	132S105 / 7330492006628

Art. No. / EAN code	132SACC00202 / 7330492002484
Art. No. / EAN code	132SACC00205 / 7330492002491
Art. No. / EAN code	132SACC00102 / 7330492001968
Art. No. / EAN code	132SACC00105 / 7330492001975

w132 Nendo t



w132 Nendo f



Article-specific information

Version	t	f
Mounting	Base	Floor base
LED Colour temperature (CCT) / Luminous flux	2700 K / 850 lm	2700 K / 850 lm
Voltage / System power	100–240 V / 15 W	100–240 V / 15 W
Efficacy	57 lm / W	57 lm / W
Light control	Dimmer switch on cord	Dimmer switch on cord
Net weight	6.3 kg	7.0 kg
Packaging dimensions	L68.6 × W37.7 × H33.7 cm (0.09 m ³)	Box 1: L68.6 × W37.7 × H33.7 cm (0.09 m ³) Box 2: L123.2 × W9.4 × H5.6 cm (0.006 m ³)
Gross weight	10.1 kg	Box 1: 10.1 kg Box 2: 1.4 kg
Colour	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016) <input type="radio"/>	132T102 / 7330492006697	132F102 / 7330492006512
Jet black (RAL 9005) <input checked="" type="radio"/>	132T105 / 7330492006710	132F105 / 7330492006536
Accessories	Art. No. / EAN code	Art. No. / EAN code
1-phase track adapter with steel wire suspension white <input type="radio"/>		
1-phase track adapter with steel wire suspension black <input checked="" type="radio"/>		
3-phase track adapter with steel wire suspension white <input type="radio"/>		
3-phase track adapter with steel wire suspension black <input checked="" type="radio"/>		