




w151 Extra large pendant s1 3000 K / traffic white

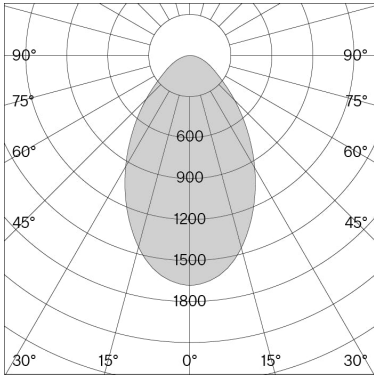

w151 Extra large pendant s2 3000 K / traffic white

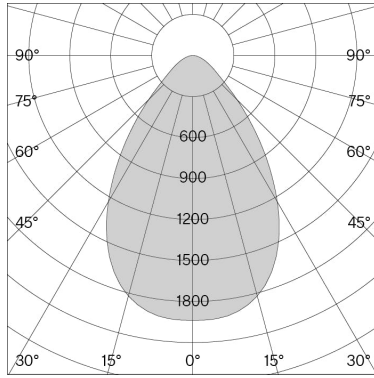

w151 Extra large pendant s1



## Technical information

<b>Physical</b>	
<b>Material</b>	Shade: aluminium Canopy: polycarbonate
<b>Optics</b>	Diffuser: acrylic
<b>IP rating</b>	20
<b>Protection class</b>	I

<b>LED</b>	
<b>Light source</b>	Integrated LED
<b>Life time expectancy</b>	L80 / 50,000 h
<b>CRI Colour Rendering Index</b>	≥ 90
<b>Standard deviation of colour matching</b>	3-step MacAdam
<b>Replaceable by a professional</b>	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

## Article-specific information

<b>Version</b>	s1
<b>Mounting</b>	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 3910 lm 3000 K / 4096 lm
<b>Voltage / System power</b>	220–240 V / 46 W
<b>Efficacy</b>	88 lm / W
<b>Light control</b>	DALI dim-Push dim
<b>Net weight</b>	5.5 kg
<b>Packaging dimensions</b>	L55 × W55 × H134 cm (0.4 m <sup>3</sup> )
<b>Gross weight</b>	10 kg


<b>2700 K Colour temperature (CCT)</b>	
<b>Traffic White (RAL 9016)</b>	
<b>Jet black (RAL 9005)</b>	
<b>Red orange (RAL 2001)</b>	
<b>Carmine red (RAL 3002)</b>	
<b>Purple red (RAL 3004)</b>	
<b>Raw brushed</b>	

<b>3000 K Colour temperature (CCT)</b>	
<b>Traffic white (RAL 9016)</b>	
<b>Jet black (RAL 9005)</b>	
<b>Red orange (RAL 2001)</b>	
<b>Carmine red (RAL 3002)</b>	
<b>Purple red (RAL 3004)</b>	
<b>Raw brushed</b>	


<b>Art. No. / EAN code</b>	
	151S1279016 / 7330492008950
	151S1279005 / 7330492008943
	151S1272001 / 7330492008967
	151S1270002 / 7330492000787

<b>Art. No. / EAN code</b>	
	151S1309016 / 7330492008981
	151S1309005 / 7330492008974
	151S1302001 / 7330492008998
	151S1300002 / 7330492000794

## w151 Extra large pendant s2



## w151 Extra large pendant s3



## Article-specific information

Version	s2	s3
Mounting	Ceiling suspended	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 4437 lm 3000 K / 4647 lm	2700 K / 5091 lm 3000 K / 5331 lm
Voltage / System power	220–240 V / 46 W	220–240 V / 46 W
Efficacy	100 lm / W	115 lm / W
Light control	DALI dim-Push dim	DALI dim-Push dim
Net weight	6.5 kg	11.5 kg
Packaging dimensions	L89 × W89 × H93 cm (0.74 m <sup>3</sup> )	L142 × W142 × H54 cm (1.09 m <sup>3</sup> )
Gross weight	15 kg	24 kg
2700 K Colour temperature (CCT)	Art. No. / EAN code	Art. No. / EAN code
Traffic White (RAL 9016)	151S2279016 / 7330492009018	151S3279016 / 7330492009070
Jet black (RAL 9005)	151S2279005 / 7330492009001	151S3279005 / 7330492009063
Red orange (RAL 2001)		
Carmine red (RAL 3002)	151S2273002 / 7330492009025	
Purple red (RAL 3004)		151S3273004 / 7330492009087
Raw brushed	151S2270002 / 7330492000800	151S3270002 / 7330492000824
3000 K Colour temperature (CCT)	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	151S2309016 / 7330492009049	151S3309016 / 7330492009100
Jet black (RAL 9005)	151S2309005 / 7330492009032	151S3309005 / 7330492009094
Red orange (RAL 2001)		
Carmine red (RAL 3002)	151S2303002 / 7330492009056	
Purple red (RAL 3004)		151S3303004 / 7330492009117
Raw brushed	151S2300002 / 7330492000817	151S3300002 / 7330492000831