


w1531le

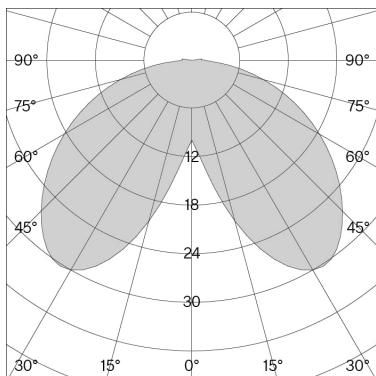

## Technical information

### Physical

<b>Material</b>	Shade & base: aluminium
-----------------	----------------------------

<b>Optics</b>	Reflector: ABS Diffuser: PMMA
---------------	----------------------------------

<b>IP rating</b>	20
------------------	----

<b>Protection class</b>	III
-------------------------	-----

### LED

<b>Light source</b>	COB LED (included)
---------------------	--------------------

<b>Life time expectancy</b>	L80 / 50,000 h
-----------------------------	----------------

<b>CRI Colour Rendering Index</b>	97
-----------------------------------	----

<b>Standard deviation of colour matching</b>	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

## Article-specific information

### Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

### Colour

Traffic white (RAL 9016)

Jet black (RAL 9005)

Poppy red (NCS S-0580 Y80R)


Sky blue (NCS S-0515R90B)

Light yellow (NCS S-1020 G80Y)

Grey brown (NCS S-5010 Y90R)

Petrol (NCS S-6530 B30G)

w153 île



Base, clamp and wall-mounted

2700 K / 110 lm

100–240 V / 7.5 W

14 lm / W

On/Off Switch on cord

0.4 kg

L21 × W21 × H11 cm (0.005 m<sup>3</sup>)

0.8 kg

### Art. No. / EAN code

153M19016 / 7330492007991

153M19005 / 7330492007984

153M10580 / 7330492006062

153M10515 / 7330492006079

153M11020 / 7330492006086

153M15010 / 7330492006093

153M16530 / 7330492006109