


w171 Alma signal white

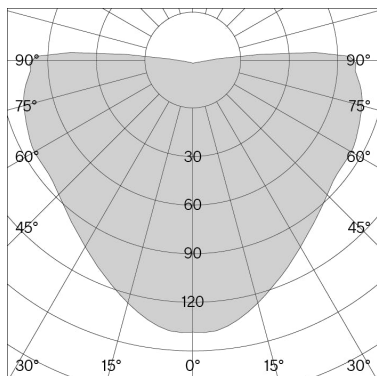

Technical information

Physical

Material	Shade: aluminium Ceiling / Wall bracket: steel Canopy: polyamide
-----------------	---

IP-rating	20
------------------	----

Protection class	cw: I s/w: II
-------------------------	---------------

LED

Light source	1 x E27 socket
---------------------	----------------

Life time expectancy	15,000 h
-----------------------------	----------

CRI Colour Rendering Index	≥ 80
-----------------------------------	------

Replaceable light source by end-user

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version

Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

Colour / Finish

Signal white (RAL 9003) ●

Grey white (RAL 9002) ●

Raw ●

Accessories


1-phase track adapter white

1-phase track adapter black

3-phase track adapter white

3-phase track adapter black

w171 Alma s

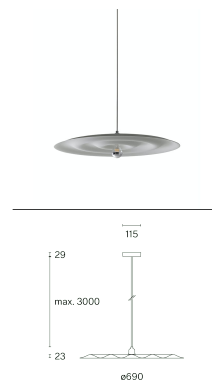

s

Ceiling suspended

2700 K / 660 lm

220–240 V / Max. 12 W LED

94 lm / W

Phase-cut dim

2.6 kg

L77 × W78 × H8 cm (0.05 m³)

3.8 kg

Art. No. / EAN code

171S19003 / 7330492007953

171S19002 / 7330492007946

171S10002 / 7330492001715

Art. No. / EAN code


ACC00102 / 7330492001920

ACC00105 / 7330492001937


ACC00202 / 7330492001944

ACC00205 / 7330492001951

w171 Alma c/w



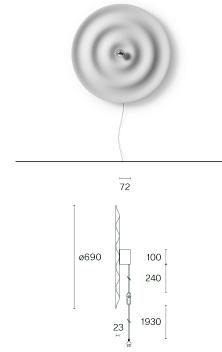


w171 Alma w



Article-specific information

Version	c/w	w
Mounting	Ceiling / Wall	Wall
LED Colour temperature (CCT) / Luminous flux	2700 K / 660 lm	2700 K / 660 lm
Voltage / System power	220–240 V / Max. 12 W LED	220–240 V / Max. 12 W LED
Efficacy	94 lm / W	94 lm / W
Light control	Phase-cut dim	Dimmer switch on cord
Net weight	2.8 kg	2.9 kg
Packaging dimensions	L77 × W78 × H8 cm (0.05 m ³)	L77 × W78 × H8 cm (0.05 m ³)
Gross weight	4.0 kg	4.1 kg

Colour / Finish

Signal white (RAL 9003)	
Grey white (RAL 9002)	
Raw	

Art. No. / EAN code

171C / W19003
171C / W19002
171C / W10002

Art. No. / EAN code

171W19003 / 7330492007977
171W19002 / 7330492007960
171W10002 / 7330492001722

Accessories

1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black

Art. No. / EAN code

Art. No. / EAN code