


## w171 Alma signal white

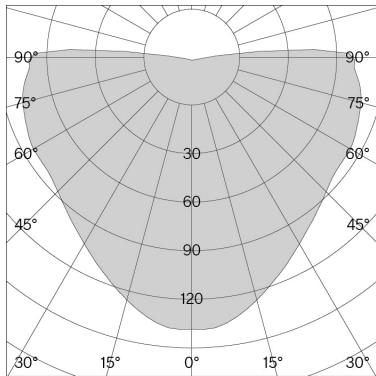

## Technical information

### Physical

<b>Material</b>	Shade: aluminium Ceiling / Wall bracket: steel Canopy: polyamide
<b>IP-rating</b>	20
<b>Protection class</b>	cw: I s/w: II

### LED

<b>Light source</b>	1 x E27 socket
<b>Life time expectancy</b>	15,000 h
<b>CRI Colour Rendering Index</b>	≥ 80
<b>Replaceable light source by end-user</b>	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

## Article-specific information

<b>Version</b>	s
<b>Mounting</b>	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 660 lm
<b>Voltage / System power</b>	220–240 V / Max. 12 W LED
<b>Efficacy</b>	94 lm / W
<b>Light control</b>	Phase-cut dim
<b>Net weight</b>	2.6 kg
<b>Packaging dimensions</b>	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )
<b>Gross weight</b>	3.8 kg


### Colour / Finish

<b>Signal white (RAL 9003)</b>	<input type="radio"/>
<b>Grey white (RAL 9002)</b>	<input type="radio"/>
<b>Raw</b>	<input type="radio"/>

### Accessories

<b>1-phase track adapter white</b>
<b>1-phase track adapter black</b>
<b>3-phase track adapter white</b>
<b>3-phase track adapter black</b>

## w171 Alma s

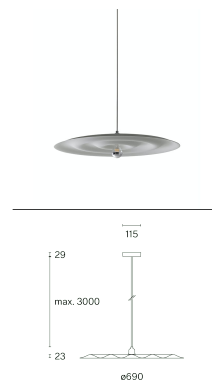

<b>Version</b>	s
<b>Mounting</b>	Ceiling suspended
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 660 lm
<b>Voltage / System power</b>	220–240 V / Max. 12 W LED
<b>Efficacy</b>	94 lm / W
<b>Light control</b>	Phase-cut dim
<b>Net weight</b>	2.6 kg
<b>Packaging dimensions</b>	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )
<b>Gross weight</b>	3.8 kg


### Art. No. / EAN code

<b>171S19003</b> / 7330492007953
<b>171S19002</b> / 7330492007946
<b>171S10002</b> / 7330492001715


### Art. No. / EAN code

<b>ACC00102</b> / 7330492001920
<b>ACC00105</b> / 7330492001937
<b>ACC00202</b> / 7330492001944
<b>ACC00205</b> / 7330492001951

## w171 Alma c/w



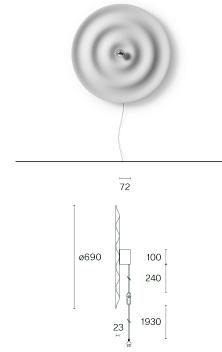


## w171 Alma w



## Article-specific information

Version	c/w	w
Mounting	Ceiling / Wall	Wall
LED Colour temperature (CCT) / Luminous flux	2700 K / 660 lm	2700 K / 660 lm
Voltage / System power	220–240 V / Max. 12 W LED	220–240 V / Max. 12 W LED
Efficacy	94 lm / W	94 lm / W
Light control	Phase-cut dim	Dimmer switch on cord
Net weight	2.8 kg	2.9 kg
Packaging dimensions	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )
Gross weight	4.0 kg	4.1 kg

### Colour / Finish

Signal white (RAL 9003)	
Grey white (RAL 9002)	
Raw	

### Art. No. / EAN code

<b>171C</b> / W19003
<b>171C</b> / W19002
<b>171C</b> / W10002

### Art. No. / EAN code

<b>171W19003</b> / 7330492007977
<b>171W19002</b> / 7330492007960
<b>171W10002</b> / 7330492001722

### Accessories

1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black

### Art. No. / EAN code

### Art. No. / EAN code