


w181 Linier 4000 K

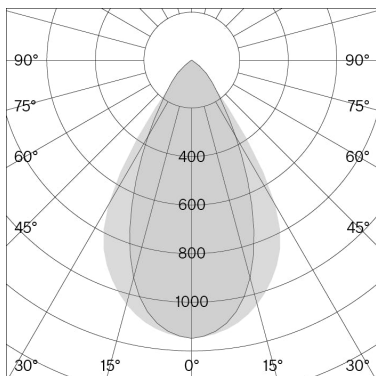

Technical information

Physical

Material	Lamp body: aluminium Canopy & bracket: ABS
-----------------	--

Optics	Louver: polyamide Lens: PMMA
---------------	---------------------------------

IP-rating	20
------------------	----

Protection class	II
-------------------------	----

LED

Light source	Integrated LED (included)
---------------------	------------------------------

Life time expectancy	L80 / 50,000 h
-----------------------------	----------------

CRI Colour Rendering Index	≥ 90
-----------------------------------	------

Standard deviation of colour matching	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version

Mounting

Colour temperature (CCT)/ Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

2700 K Colour temperature (CCT)

Jet black (RAL 9005) ●

3000 K Colour temperature (CCT)

Jet black (RAL 9005) ●


Traffic white (RAL 9016) ●

4000 K Colour temperature (CCT)

Jet black (RAL 9005) ●

Traffic white (RAL 9016) ●

w181 Linier

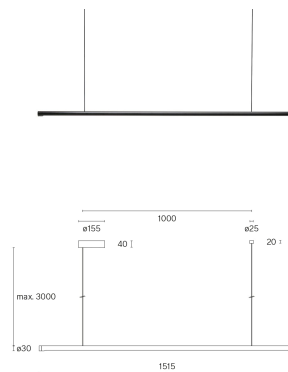

w181 Linier

Ceiling suspended

2700 K / 2205 lm
3000 K / 2205 lm
4000 K / 2380 lm

220-240 V / 60 W

40 lm / W

DALI dim-Push dim / Integrated rotary dimmer

1.7 kg

L173 × W18 × H8 cm (0.03 m³)

2.4 kg

Art. No. / EAN code

181S152705 / 7330492000121


Art. No. / EAN code

181S153005 / 7330492000138


Art. No. / EAN code

181S154005 / 7330492000145

w181 Linier pro s1

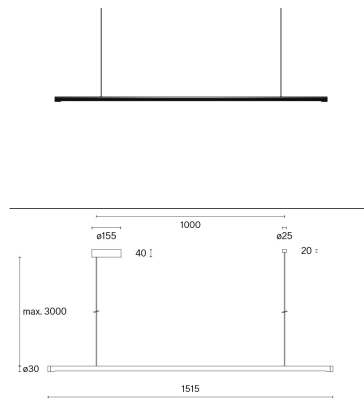

w181 Linier pro s2

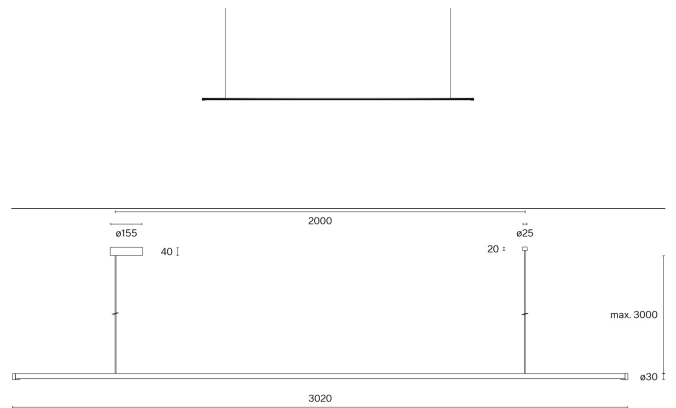

Article-specific information

Version	pro s1	pro s2
Mounting	Ceiling suspended	Ceiling suspended
Colour temperature (CCT)/ Luminous flux	3000 K / 2730 lm 4000 K / 2781 lm	3000 K / 5460 lm 4000 K / 5686 lm
Voltage / System power	220–240 V / 20.7 W	220–240 V / 41.4 W
Efficacy	134 lm / W	137 lm / W
Light control	DALI dim-Push dim	DALI dim-Push dim
Net weight	1.7 kg	2.7 kg
Packaging dimensions	 	
Gross weight	 	
2700 K Colour temperature (CCT)	Art. No. / EAN code	Art. No. / EAN code
Jet black (RAL 9005) ●		
3000 K Colour temperature (CCT)	Art. No. / EAN code	Art. No. / EAN code
Jet black (RAL 9005) ●	181PS123005 / 7330492002088	181PS223005 / 7330492002125
Traffic white (RAL 9016) ●	181PS123002 / 7330492002101	181PS223002 / 7330492002149
4000 K Colour temperature (CCT)	Art. No. / EAN code	Art. No. / EAN code
Jet black (RAL 9005) ●	181PS124005 / 7330492002095	181PS224005 / 7330492002132
Traffic white (RAL 9016) ●	181PS124002 / 7330492002118	181PS224002 / 7330492002156