


w224 Alto pendant traffic white



Technical information

Physical

Material	Canopy, rod & lamp body: aluminium
Optics	Reflector: polycarbonate Cover: glass
IP rating	20
Protection class	I

LED

Light source	COB LED (included)
Lifetime expectancy	L80 / 50,000 h
CRI Colour rendering index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	s1
Mounting	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 10350 lm 3000 K / 10790 lm
Voltage / System power	220–240 V / 91 W
Efficacy	118 lm / W
Light control	DALI dim-Push dim
Net weight	2.7 kg / 2.7 kg
Packaging dimensions	L23.4 × W22 × H18.4cm / L23.4 × W22 × H18.4cm
Gross weight	3.4 kg / 3.4 kg

s1 / s1 r: 2700 K (CCT) / 1.2 m rod

Traffic white (RAL 9016)	<input type="radio"/>
Jet black (RAL 9005)	<input checked="" type="radio"/>
Raw tumbled	<input type="radio"/>

s1 / s1 r: 2700 K (CCT) / 2.5 m rod

Traffic white (RAL 9016)	<input type="radio"/>
Jet black (RAL 9005)	<input checked="" type="radio"/>
Raw tumbled	<input type="radio"/>

s1 / s1 r: 3000 K (CCT) / 1.2 m rod

Traffic white (RAL 9016)	<input type="radio"/>
Jet black (RAL 9005)	<input checked="" type="radio"/>
Raw tumbled	<input type="radio"/>


s1 / s1 r: 3000 K (CCT) / 2.5 m rod

Traffic white (RAL 9016)	<input type="radio"/>
Jet black (RAL 9005)	<input checked="" type="radio"/>
Raw tumbled	<input type="radio"/>

Accessories

Casambi module

w224 Alto pendant s1



Version	s1
Mounting	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 10350 lm 3000 K / 10790 lm
Voltage / System power	220–240 V / 91 W
Efficacy	118 lm / W
Light control	DALI dim-Push dim
Net weight	2.7 kg / 2.7 kg
Packaging dimensions	L23.4 × W22 × H18.4cm / L23.4 × W22 × H18.4cm
Gross weight	3.4 kg / 3.4 kg

Art. No. / EAN code

224S102272 / 7330492002637
224S105272 / 7330492002644
224S120272 / 7330492010694

Art. No. / EAN code

224S1202272 / 7330492002675
224S1205272 / 7330492002682
224S1220272 / 7330492010717

Art. No. / EAN code

224S102302 / 7330492002217
224S105302 / 7330492002224
224S120302 / 7330492010700


Art. No. / EAN code

224S1202302 / 7330492002651
224S1205302 / 7330492002668
224S1220302 / 7330492010724

Art. No. / EAN code

DR-0601 / 7330492000510

w224 Alto pendant s1 r

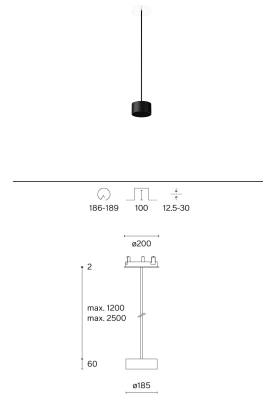

Article-specific information

Version	s1 r
Mounting	Ceiling suspended
LED Colour temperature (CCT) / Luminous flux	2700 K / 10350 lm 3000 K / 10790 lm
Voltage / System power	220–240 V / 91 W
Efficacy	118 lm / W
Light control	DALI dim-Push dim
Net weight	2.7 kg / 2.7 kg
Packaging dimensions	L23.4 × W22 × H18.4cm / L23.4 × W22 × H18.4cm
Gross weight	3.4 kg / 3.4 kg

s1 / s1 r: 2700 K (CCT) / 1.2 m rod

	Art. No. / EAN code
Traffic white (RAL 9016)	224S11R02272 / 7330492002699
Jet black (RAL 9005)	224S11R05272 / 7330492002705
Raw tumbled	224S11R20272 / 7330492002712

s1 / s1 r: 2700 K (CCT) / 2.5 m rod

	Art. No. / EAN code
Traffic white (RAL 9016)	224S12R02272 / 7330492002750
Jet black (RAL 9005)	224S12R05272 / 7330492002767
Raw tumbled	224S12R20272 / 7330492002774

s1 / s1 r: 3000 K (CCT) / 1.2 m rod

	Art. No. / EAN code
Traffic white (RAL 9016)	224S11R02302 / 7330492002729
Jet black (RAL 9005)	224S11R05302 / 7330492002736
Raw tumbled	224S11R20302 / 7330492002743

s1 / s1 r: 3000 K (CCT) / 2.5 m rod

	Art. No. / EAN code
Traffic white (RAL 9016)	224S12R02302 / 7330492002781
Jet black (RAL 9005)	224S12R05302 / 7330492002798
Raw tumbled	224S12R20302 / 7330492002804

Accessories

Casambi module

Art. No. / EAN code