


## w223 Pawson marble

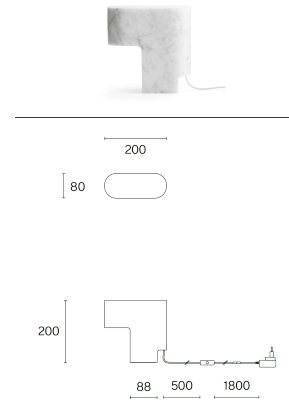

## Technical information


Physical	
<b>Material</b>	Lamp body: marble/ aluminium Dimmer housing on cord: ABS
<b>Optics</b>	Lens: polycarbonate
<b>IP rating</b>	20
<b>Protection class</b>	II
LED	
<b>Light source</b>	Integrated LED
<b>Lifetime expectancy</b>	L80 / 50,000 h
<b>CRI Colour rendering index</b>	≥ 95
<b>Stand. deviation of colour</b>	3-step MacAdam
<b>Replaceable by a professional</b>	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

## Article-specific information

<b>Version</b>	Marble
<b>Mounting</b>	Base
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 115 lm
<b>Voltage / System power</b>	100–240 V / 7.8 W
<b>Efficacy</b>	15 lm/W
<b>Light control</b>	Dimmer switch on cord
<b>Net weight</b>	5.1 kg
<b>Packaging dimensions</b>	L23.9 x W23.9 x H11.1cm (0.006 m³)
<b>Gross weight</b>	6.0 kg
<b>Finish</b>	<b>Art. No. / EAN code</b>
<b>Marble</b> <input checked="" type="radio"/>	<b>223T14027</b> / 7330492000527
<b>Aluminium</b> <input type="radio"/>	

## w223 Pawson aluminium

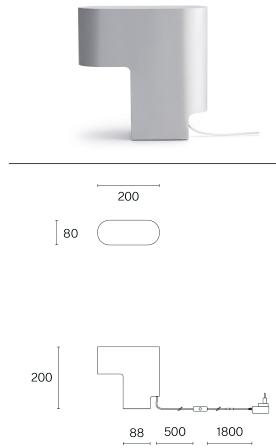

## Article-specific information

<b>Version</b>	Aluminium
<b>Mounting</b>	Base
<b>LED Colour temperature (CCT) / Luminous flux</b>	2700 K / 135 lm
<b>Voltage / System power</b>	100–240 V / 7.8 W
<b>Efficacy</b>	17 lm/W
<b>Light control</b>	Dimmer switch on cord
<b>Net weight</b>	1.2 kg
<b>Packaging dimensions</b>	L26.1 × W24.7 x H13.1 cm (0.008 m <sup>3</sup> )
<b>Gross weight</b>	1.7 kg
<b>Finish</b>	<b>Art. No. / EAN code</b>
<b>Marble</b> <input type="radio"/>	
<b>Aluminium</b> <input checked="" type="radio"/>	<b>223T12027 / 7330492000534</b>