


w222 Focal

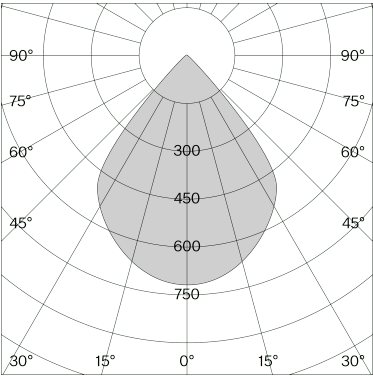

Teknisk information

Allmänt	
Material	Lampkropp: aluminium Takkopp: polykarbonat
Optik	Lins: PMMA Reflektor: polykarbonat
IP-klass	20
Isoleringsklass	I
LED	
Ljuskälla	COB LED (inkluderad)
Livslängd	L80 / 50,000 h
CRI Färgåtergivningsindex	90
Standardavvikelse för färgmatchning	3-stegs MacAdam
Utbytbar av en professionell	

De tekniska uppgifterna är nominella värden för en omgivningstemperatur på 25 °C. För uppgifterna om ljusflöde gäller initialt en tolerans på +/- 10 %, för uppgifterna om elektrisk anslutningseffekt initialt en tolerans på +/- 10 % och för uppgifterna om färgtemperatur initialt en tolerans på +/- 150 kelvin. Vi reserverar oss för eventuella tryckfel. De tillämpliga allmänna villkoren gäller.

Artikelspecifik information

Version
Montering
LED Färgtemperatur (CCT) / Ljusflöde armatur
Spänning / Watt
Ljusutbyte armatur
Ljuskontroll
Nettovikt
Emballagets dimensioner
Bruttovikt

Phase-cut dim

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw tumbled	●


DALI dim-Push dim

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Pale red (NCS S 1010-Y90R)	●
Pale green (NCS S 2005-B50G)	●
Pale blue (NCS S 1010-R90B)	●
Raw tumbled	●

Accessoarer

Casambi-modul
Ceiling installation cover plate
1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black
3-phase track DALI adapter white
3-phase track DALI adapter black

w222 Focal c

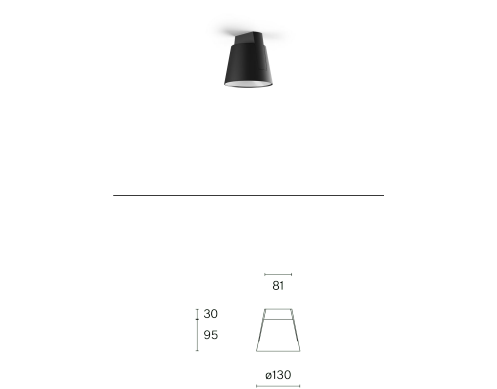

c
Väggfäste
2700 K / 885 lm
220–240 V / 9.6 W
92 lm / W
Phase-cut dim / DALI dim-Push dim / Casambi
0.48 kg
L22.3 × W20.9 × H17.7 cm
0.85 kg

Art. Nr. / EAN code

222C102271 / 7330492001395
222C105271 / 7330492001401
222C120271 / 7330492001449


Art. Nr. / EAN code

222C102272 / 7330492000367
222C105272 / 7330492000374
222C103272 / 7330492000381
222C101272 / 7330492000398
222C106272 / 7330492000404
222C120272 / 7330492001302


Art. Nr. / EAN code

DR-0601 / 7330492000510
222-JC02 / 7330492002507

w222 Focal s

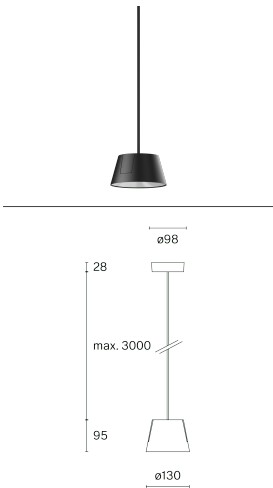

w222 Focal w

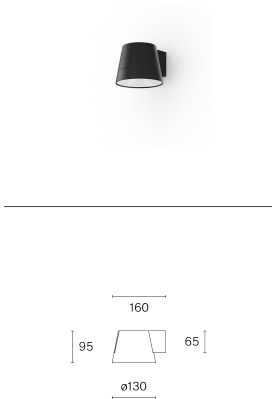

Artikelspecifik information

Version
Montering
LED Färgtemperatur (CCT) / Ljusflöde armatur
Spänning / Watt
Ljusutbyte armatur
Ljuskontroll
Nettovikt
Emballagets dimensioner
Bruttovikt

s
Takkopp
2700 K / 885 lm
220–240 V / 9.6 W
92 lm / W
Phase-cut dim / DALI dim-Push dim / Casambi
0.73 kg
L22.3 × W21.2 × H20 cm
1.2 kg

w
Väggfäste
2700 K / 885 lm
220–240 V / 9.6 W
92 lm / W
Phase-cut dim / DALI dim-Push dim / Casambi
0.48 kg
L22.3 × W20.9 × H17.7 cm
0.85 kg

Phase-cut dim

Art. Nr. / EAN code

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw tumbled	

222S102271 / 7330492001456
222S105271 / 7330492001463
222S120271 / 7330492001500

Art. Nr. / EAN code

222W102271 / 7330492001517
222W105271 / 7330492001524
222W120271 / 7330492001562

DALI dim-Push dim

Art. Nr. / EAN code

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Pale red (NCS S 1010-Y90R)	
Pale green (NCS S 2005-B50G)	
Pale blue (NCS S 1010-R90B)	
Raw tumbled	

222S102272 / 7330492000411
222S105272 / 7330492000428
222S103272 / 7330492000435
222S101272 / 7330492000442
222S106272 / 7330492000459
222S120272 / 7330492001319

Art. Nr. / EAN code

222W102272 / 7330492000466
222W105272 / 7330492000374
222W103272 / 7330492000480
222W101272 / 7330492000497
222W106272 / 7330492000503
222W120272 / 7330492001326

Accessoarer

Art. Nr. / EAN code


Casambi-modul
Ceiling installation cover plate
1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black
3-phase track DALI adapter white
3-phase track DALI adapter black

DR-0601 / 7330492000510
ACC00102 / 7330492001920
ACC00105 / 7330492001937
ACC00202 / 7330492001944
ACC00205 / 7330492001951
ADAPT1-001 / 7330492001982
ADAPT1-002 / 7330492001999

Art. Nr. / EAN code

DR-0601 / 7330492000510

w222 Focal r



Artikelspecifik information

Version	r
Montering	semi recessed
LED Färgtemperatur (CCT) / Ljusflöde armatur	2700 K / 885 lm
Spänning / Watt	220–240 V / 9.6 W
Ljusutbyte armatur	92 lm / W
Ljuskontroll	Phase-cut dim / DALI dim-Push dim
Nettovikt	0.3 kg
Emballagets dimensioner	L16.1 × W14.5 × H10.6 cm
Bruttovikt	0,47 kg

Phase-cut dim

Traffic white (RAL 9016)		222R102271 / 7330492001371
Jet black (RAL 9005)		222R105271 / 7330492001364
Raw tumbled		222R120271 / 7330492001388

DALI dim-Push dim

Traffic white (RAL 9016)		222R102272 / 7330492001340
Jet black (RAL 9005)		222R105272 / 7330492001333
Pale red (NCS S 1010-Y90R)		
Pale green (NCS S 2005-B50G)		
Pale blue (NCS S 1010-R90B)		
Raw tumbled		222R120272 / 7330492001357

Accessoarer

Casambi-modul	DR-0601 / 7330492000510
Ceiling installation cover plate	
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	
3-phase track DALI adapter white	
3-phase track DALI adapter black	