




w242 Pastille alu



w242 Pastille alu

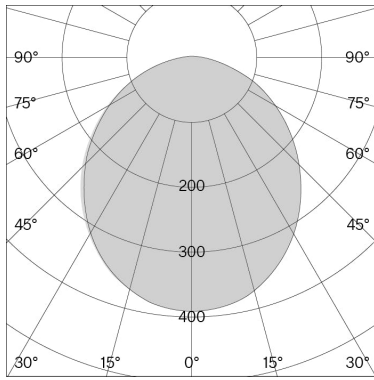

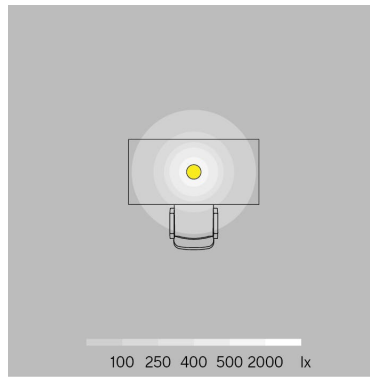

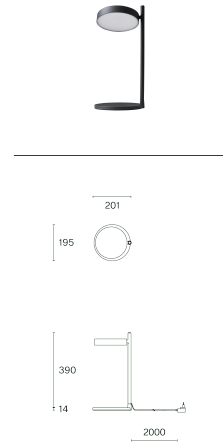


w242 Pastille alu b2



Technical information


Physical	
Material	Lamp body: aluminium Table base/clamp: aluminium & steel Pin/bracket: aluminium Floor stand: steel
Optics	Reflector: ABS Diffuser: polycarbonate
IP rating	20
Protection class	III
LED	
Light source	COB LED (included)
Life time expectancy	L80 / 50,000 h
CRI Colour Rendering Index	95
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

Article-specific information


Version	b2
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W
Efficacy	63 lm / W
Light control	Dimmable
Net weight	1.7 kg
Packaging dimensions	L51.0 × W23.2 × H7.8 cm (0.009 m³)
Gross weight	2.3 kg
Colour	
Traffic white (RAL 9016)	 242B20227 / 7330492011684
Jet black (RAL 9005)	 242B20527 / 7330492011745
Olive green (RAL 6003)	 242B20127 / 7330492011660
Oxide red (RAL 3009)	 242B20327 / 7330492011707
Raw tumbled	242B22027 / 7330492011769
Telegray 4 (RAL 7047)	 242B20427 / 7330492011721
Accessories	Art. No. / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2	
Adapter suitable for USM Haller table	
Adapter suitable for USM Haller shelf	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w242 Pastille alu c1

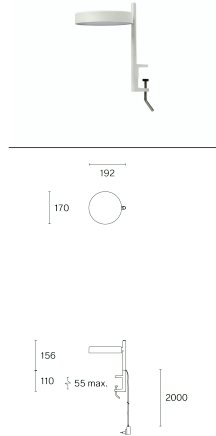

w242 Pastille alu c2

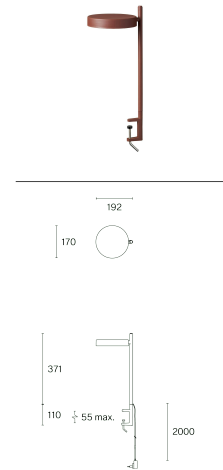

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

c1
Clamp
2700 K / 547 lm
100–240 V / 7.4 W
63 lm / W
Dimmable
0.6 kg
L36.0 × W22.3 × H5.2 cm (0.004 m ³)
0.9 kg


c2
Clamp
2700 K / 547 lm
100–240 V / 7.4 W
63 lm / W
Dimmable
0.7 kg
L51.0 × W23.2 × H7.8 cm (0.009 m ³)
1.3 kg

Colour
Traffic white (RAL 9016)
Jet black (RAL 9005)
Olive green (RAL 6003)
Oxide red (RAL 3009)
Raw tumbled
Telegray 4 (RAL 7047)
Accessories
Adapter suitable for Vitra Joyn 2 / Tyde 2
Adapter suitable for USM Haller table
Adapter suitable for USM Haller shelf


Art. No. / EAN code
242CL10227 / 7330492012162
242CL10527 / 7330492012223
242CL10127 / 7330492012148
242CL10327 / 7330492012186
242CL12027 / 7330492012247
242CL10427 / 7330492012209
Art. No. / EAN code

Art. No. / EAN code
242CL20227 / 7330492012285
242CL20527 / 7330492012346
242CL20127 / 7330492012261
242CL20327 / 7330492012308
242CL22027 / 7330492012360
242CL20427 / 7330492012322
Art. No. / EAN code

w242 Pastille alu p2

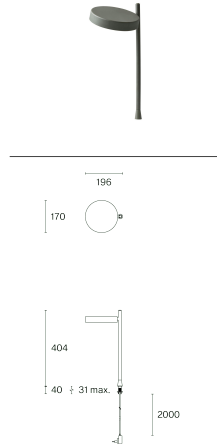

w242 Pastille alu f2

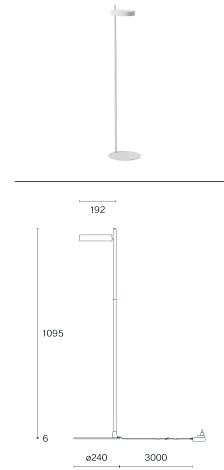


Article-specific information


Version	p2	f2
Mounting	Pin – Integrated (hole ø 20 mm)	Floor base
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.7 kg	3.6 kg
Packaging dimensions	L51.0 × W23.2 × H7.8 cm (0.009 m ³)	L119.6 × W28.8 × H6.8 cm (0.02 m ³)
Gross weight	1.3 kg	5.5 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	242P20227 / 7330492012568	242F20227 / 7330492012469
Jet black (RAL 9005)	242P20527 / 7330492012629	242F20527 / 7330492012520
Olive green (RAL 6003)	242P20127 / 7330492012544	242F20127 / 7330492012445
Oxide red (RAL 3009)	242P20327 / 7330492012582	242F20327 / 7330492012483
Raw tumbled	242P22027 / 7330492012643	
Telegray 4 (RAL 7047)	242P20427 / 7330492012605	242F20427 / 7330492012506
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2	242-ADAPT001 / 7330492011639	
Adapter suitable for USM Haller table	242-ADAPT002 / 7330492011646	
Adapter suitable for USM Haller shelf	242-ADAPT003 / 7330492011653	

w242 Pastille alu br1

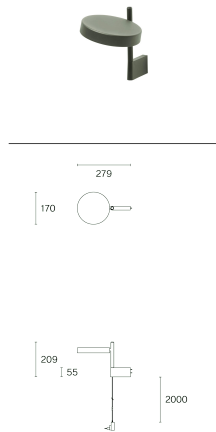

w242 Pastille alu br2

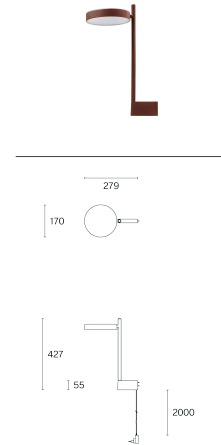

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

br1
Wall bracket
2700 K / 547 lm
100–240 V / 7.4 W
63 lm / W
Dimmable
0.6 kg
L36.0 × W22.3 × H5.2 cm (0.004 m ³)
0.9 kg

br2
Wall bracket
2700 K / 547 lm
100–240 V / 7.4 W
63 lm / W
Dimmable
0.6 kg
L51.0 × W23.2 × H7.8 cm (0.009 m ³)
1.3 kg

Colour
Traffic white (RAL 9016)
Jet black (RAL 9005)
Olive green (RAL 6003)
Oxide red (RAL 3009)
Raw tumbled
Telegray 4 (RAL 7047)
Accessories
Adapter suitable for Vitra Joyn 2 / Tyde 2
Adapter suitable for USM Haller table
Adapter suitable for USM Haller shelf

Art. No. / EAN code
242BR10227 / 7330492011868
242BR10527 / 7330492011929
242BR10127 / 7330492011844
242BR10327 / 7330492011882
242BR12027 / 7330492011943
242BR10427 / 7330492011905
Art. No. / EAN code

Art. No. / EAN code
242BR20227 / 7330492011981
242BR20527 / 7330492012049
242BR20127 / 7330492011967
242BR20327 / 7330492012001
242BR22027 / 7330492012063
242BR20427 / 7330492012025
Art. No. / EAN code