


w103 Sempé s1 traffic white

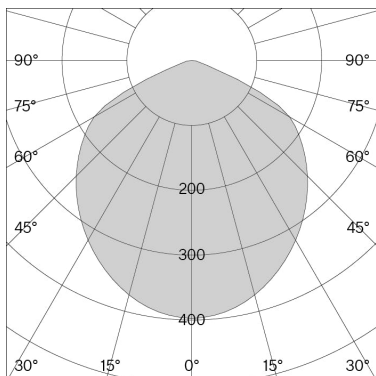

Technical information

Physical

Material	Shade, LED engine & rail: aluminium Canopy: polycarbonate
-----------------	--

Optics	Diffuser: polycarbonate
---------------	-------------------------

IP rating	20
------------------	----

Protection class	I
-------------------------	---

LED

Light source	Integrated LED
---------------------	----------------

Lifetime expectancy	L80 / 50,000 h
----------------------------	----------------

Colour rendering index (CRI)	97
-------------------------------------	----

Standard deviation of colour matching	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wästberg Lighting AB apply.

Article-specific information

Version

Mounting

Colour temperature (CCT) / Luminous flux

Efficacy

Voltage / System power

Light control


Net weight

Packaging dimensions

Gross weight

Colour

Traffic white (RAL 9016) 

Jet black (RAL 9005) 


Poppy red (NCS S-0580 Y80R) 


Light yellow (NCS S-1020 G80Y) 


Grey brown (NCS S-5010 Y90R) 


Slate blue (similar to RAL 5024) 

Accessories

1-phase track adapter white 

1-phase track adapter black 

3-phase track adapter white 

3-phase track adapter black 

w103 Sempé s1



s1

Ceiling suspended – Canopy included

2700 K / 414 lm

49 lm / W

220–240 V / 8.4 W

Phase-cut dim

0.9 kg

L36 × W36 × H21 cm (0.03 m³)

2.2kg

Art. No. / EAN code

103S19016 / 7330492005911

103S19005 / 7330492005973

103S10580 / 7330492000022

103S11020 / 7330492000039

103S15010 / 7330492000046

103S17697 / 7330492000053



Art. No. / EAN code

ACC00102 / 7330492001920

ACC00105 / 7330492001937

ACC00202 / 7330492001944



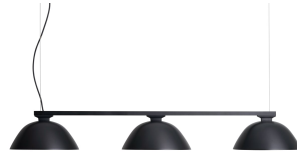

ACC00205 / 7330492001951

w103 Sempé s3

Article-specific information

Version	s3
Mounting	Ceiling suspended – Canopy and steel wire attachment included
Colour temperature (CCT) / Luminous flux	2700 K / 1242 lm
Efficacy	49 lm / W
Voltage / System power	220–240 V / 25 W
Light control	Phase-cut dim
Net weight	2.7 kg
Packaging dimensions	L127 × W37 × H24 cm (0.11 m ³)
Gross weight	4.2kg

Colour

Colour	Art. No. / EAN code
Traffic white (RAL 9016) 	103S39016 / 7330492006017
Jet black (RAL 9005) 	103S39005 / 7330492006024
Poppy red (NCS S-0580 Y80R) 	
Light yellow (NCS S-1020 G80Y) 	
Grey brown (NCS S-5010 Y90R) 	103S35010 / 7330492000060
Slate blue (similar to RAL 5024) 	

Accessories

Accessories	Art. No. / EAN code
1-phase track adapter white 	
1-phase track adapter black 	
3-phase track adapter white 	
3-phase track adapter black 	